


TURBOKOMPRESORA MARĶĒŠANA

SEALING OF THE TURBOCOMPRESSOR

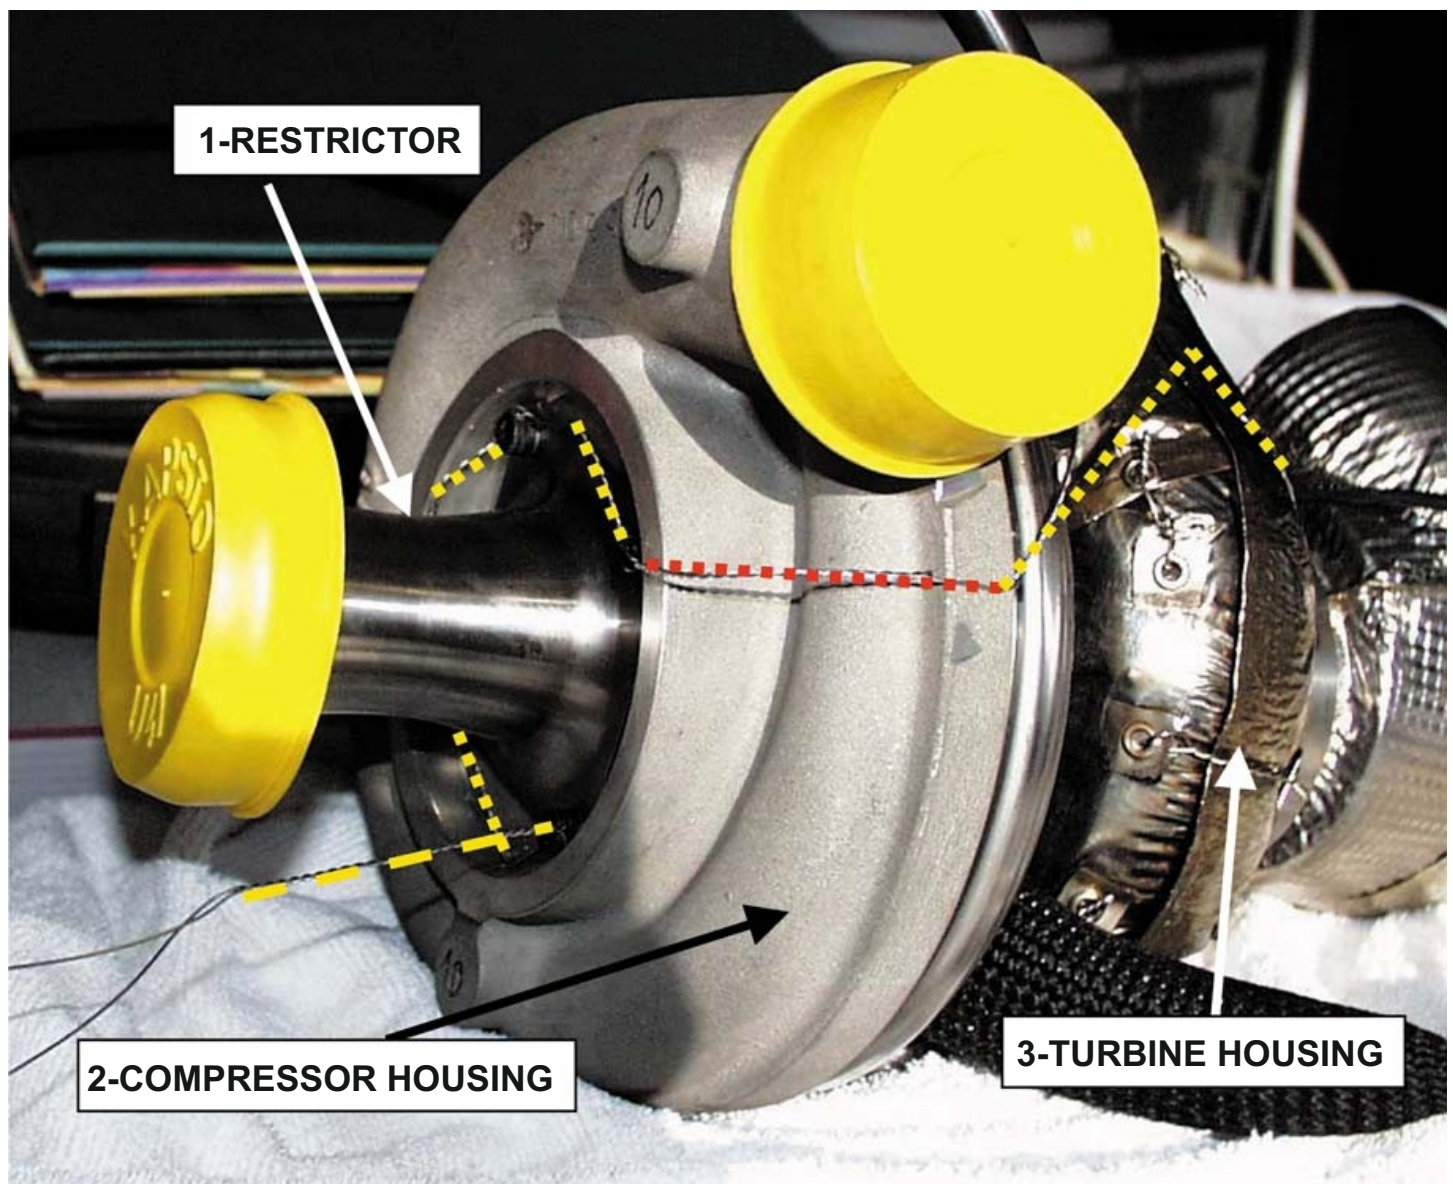

The articles 254-6.1 (Group N) and 255-5.1.8.3 (Group A) from Appendix J state: The restrictor must be made from a single material and may be pierced solely for the purpose of mounting and sealing, which must be carried out between the mounting screws, between the restrictor (or the restrictor/compressor housing attachment), the compressor housing (or the housing/flange attachment) and the turbine housing (or the housing/flange attachment) (see drawing 254-4).